Codici d'ordine	Descrizione	(Numero Raggi – Altezza barriera)	
WSA Micro 05	**(*)**	2 or (4) direct beams barrier (crossed)	H= **0,5 Metres**
WSA Micro 10	**(*)**	4 or (10) direct beams barrier (crossed)	H= **1,0 Metres**
WSA Micro 13	**(*)**	5 or (13) direct beams barrier (crossed)	H= **1,3 Metri**
WSA Micro 15	**(*)**	6 or (16) direct beams barrier (crossed)	H= **1,5 Metri**
WSA Micro 20	**(*)**	8 or (22) direct beams barrier (crossed)	H= **2,0 Metri**
WSA Micro 25	**(*)**	10 or (28) direct beams barrier (crossed)	H= **2,5 Metri**

(*) B = WHITE Profile and **WHITE** cap

N = BLACK Profile and **BLACK** cap

CE

USER GUIDE

WSA Micro 05 … 25 B / N

OPTICAL DOUBLE

Micro - BARRIER from 2 to 10 OPTICAL with inside electronics

APPLICATIONS

- **Anti-intrusion for Doors and Windows**
- **Detector switch**

OPTEA s.r.l.

Via Saragat , 14
40062 Molinella (BO) - ITALY

Tel.: +39 051 665.00.71 Fax.: +39 051 665.00.28

Sito internet : www.optea.it e-mail : info@optea.it

IST_MICRO_003

Wiring – Trimming **WSA Micro**

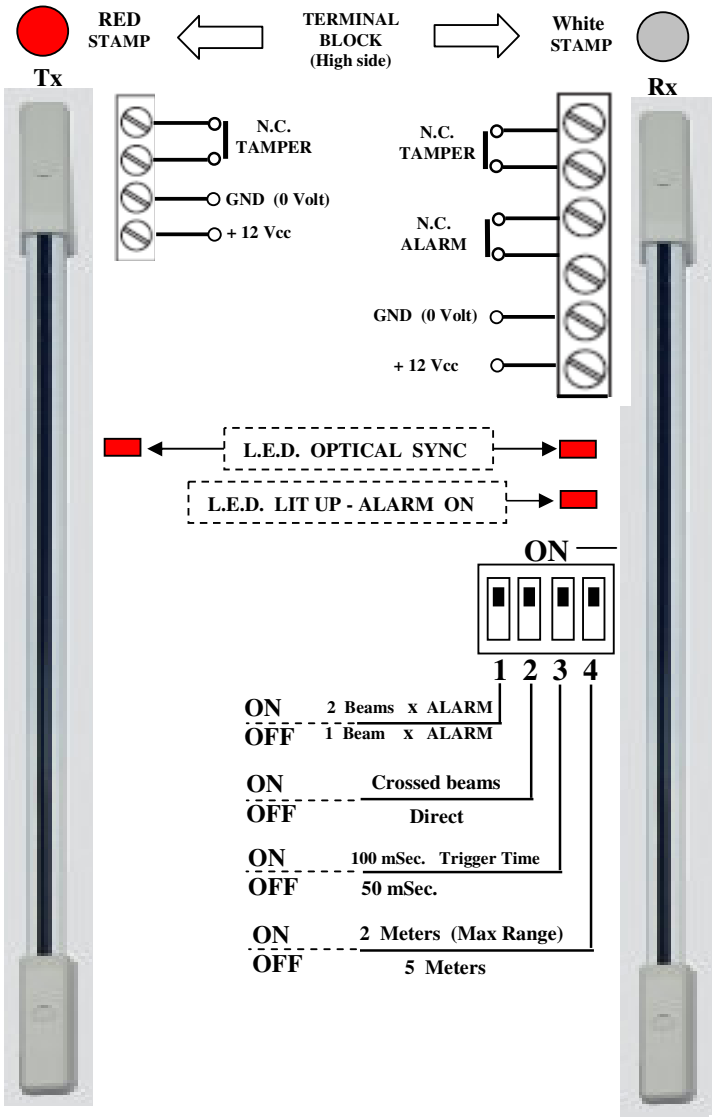

Tecnichal features WSA - Micro

Optical range	**: 2** o **5** Metres ***selectable***
No. of beams for alarm	**: 1** or **2** (adjacent) ***selectable***
No. of beams Direct / Cross	**: 2 … 10 / (4 ..28)** ***selectable***
Triggering Time	**: 50** or **100** mSec. ***selectable***
Recovery Time	**: 1** Second
V. Supply	**: 12** Volt (**11÷15**) Vdc
Supply Current (Tx + Rx)	**: 60** mA with 4 Beams + **15** mA each 2 more beams
Outputs Barrier	: N.C. **ALARM** (Rx only) and N.C. **TAMPER**
Contact load	**: 24** Vcc - **0.5** A max
Operation temperature	**: (-15/+60)** °C
IP grade	**: IP 44**
Size Aluminum Profile	**: 17.5 x 14 mm** (width x thickness)
Cap size	**: 100 x 24 x 20 mm** (length x width x thickness)

Aluminum profile

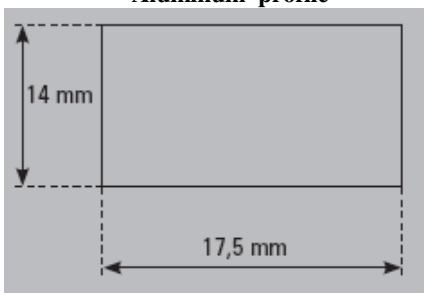

Plastic CAP